




Series
AVU

Air Velocity Transmitter

Ideal for Building Automation Systems, $\pm 5\%$ or $\pm 8\%$ Full Scale Accuracy

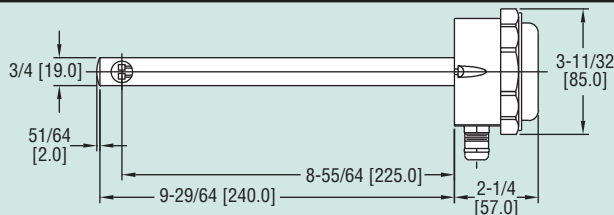

The Series AVU Air Velocity Transmitter is ideal for a wide range of HVAC measurement and control applications, particularly in complete building control and energy management systems. The Series AVU is available with 5% or 8% accuracy at a surprisingly low cost, with 9 models covering ranges from 0-785 FPM to 0-3150 FPM, with either 4-20 mA or 0-10 VDC output.

The Series AVU Transmitter operates by measuring the heat loss from one of the two sensing elements in the air stream, then calculating the air velocity. Units are virtually immune to drift due to the design of the sensing element, which makes the transmitter accurate over the whole air velocity range.

FEATURES

- 4 to 20 mA or 0 to 10 V output versions
- NEMA 6 (IP67) enclosure rating
- AC or DC powered (loop version DC only)
- 5% or 8% accuracy

APPLICATIONS

- Supply and exhaust fan tracking
- Clean room systems
- Air pollution studies and manufacturing
- Process control systems

OPTION

For NIST traceable calibration certificate, use order code NISTCAL-AV1.

SPECIFICATIONS

Service: Clean air and compatible, non-combustible gases.

Accuracy: AVU: $\pm 5\%$ of full-scale; AVUB: $\pm 8\%$ of full-scale.

Response Time (90%): 5 sec (typical).

Temperature Limits: 32 to 122°F (0 to 50°C).

Humidity Limit: 0-90% RH, non-condensing.

Power Requirements: -A models 24 VDC +10% -15%; -V models 24 VDC or 24 VAC +10% - 15%.

Output Signal: -A models 4 to 20 mA current loop; -V models 0-10 VDC.

Loop Resistance: (-A models) 700 Ω .

Current Consumption: 60 mA + output current.

Max. Start Up Current: 85 mA; 10 V.

Output Current Limit: (-V models) >10 mA.

Electrical Connections: Screw terminal. Cable gland for 4-8 mm wire (16 gauge wire).

Enclosure Rating: NEMA 6 (IP67) except sensing point.

Probe Dimensions: 9.45 x .75" (240 x 19 mm).

Mounting Orientation: Unit not position sensitive. Probe must be aligned with airflow.

Weight: 8.8 oz (250 g).

Agency Approvals: CE.

Model	Range	Output	Accuracy
AVU-1-A	0 to 785 fpm (0 to 4 m/s)	4 to 20 mA	5%
AVU-2-A	0 to 1575 fpm (0 to 8 m/s)	4 to 20 mA	5%
AVU-3-A	0 to 3150 fpm (0 to 16 m/s)	4 to 20 mA	5%
AVU-1-V	0 to 785 fpm (0 to 4 m/s)	0 to 10 VDC	5%
AVU-2-V	0 to 1575 fpm (0 to 8 m/s)	0 to 10 VDC	5%
AVU-3-V	0 to 3150 fpm (0 to 16 m/s)	0 to 10 VDC	5%
AVUB-1-V	0 to 785 fpm (0 to 4 m/s)	0 to 10 VDC	8%
AVUB-2-V	0 to 1575 fpm (0 to 8 m/s)	0 to 10 VDC	8%
AVUB-3-V	0 to 3150 fpm (0 to 16 m/s)	0 to 10 VDC	8%